


BANNERSAVER™

THE WORLD'S LEADING WIND-SPILLING BRACKET SYSTEM



INSTALLATION GUIDE




SCAN THE QR CODE TO VIEW BANNERSAVER™ INSTALLATION VIDEOS.

PRE-INSTALLATION

Congratulations! You've chosen BannerSaver™, the world's premier wind-spilling banner bracket. Before you begin installation. Carefully read this page to: familiarize yourself with the components of a BannerSaver kit, gather the additional tools needed for proper installation, and ensure you've purchased the correct banding for your project.

STANDARD BANNERSAVER™ KIT

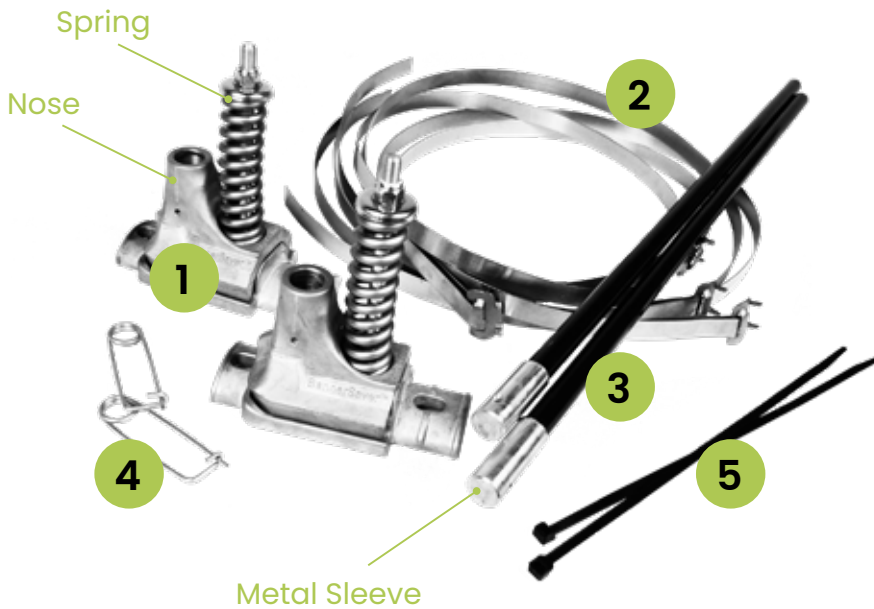

- 1 BannerSaver™ Bracket(s)
- 2 Banding (Sold Separately)
- 3 Fiberglass arm(s)
- 4 Pin(s)
- 5 Zip tie(s)

ADDITIONAL TOOLS REQUIRED FOR INSTALLATION

- Lift truck (if applicable)
- Electric screwdriver with 5/16" nut driver (standard banding)
- Banding tool (heavy banding)
- Tin snips
- Plastic snips
- Duct tape

CONFIRM YOU HAVE CORRECT BANDING

Choosing the right banding is essential for correct BannerSaver™ installations. Please read the following considerations before ordering and installation. **Read more about Heavy vs. Standard banding at Bannersaver.com.**

Heavy banding is ideal for all installs, but is required when installing Large and XL BannerSaver™ brackets. It is also recommended if you have the following situations: Tapered poles; square poles which are 4" or greater on each side; two banners per pole; and/or sites with particularly high wind speeds.

Standard banding works fine for most installations of standard BannerSaver™ brackets.

SEE STANDARD + HEAVY BANDING VIDEOS AT BANNERSAVER.COM

10-STEP INSTALLATION

The BannerSaver™ bracket is easy to install, move and adjust. Be sure to read the following step-by-step instructions – paying close attention to the **HELPFUL RECOMMENDATIONS** section – in **full** before attempting installation.

HELPFUL RECOMMENDATIONS

- We recommend a “top-to-bottom” approach. Install the top bracket first, bottom bracket second.
- It is highly recommended that you install the banner at the same time you install the brackets. Installing the brackets prior to installation the banner will likely result in necessary adjustments and incorrect measurements.
- Recommended install height: Minimum of 15’ from the ground to bottom of banner (for parking lots and street locations).
- Spring position is important. Remember: Top bracket, spring on top. Bottom bracket, spring on bottom.
- Confirm fiberglass arms are 4” longer than the width of your banner.
- If using standard banding, use 3 bands per bracket – 2 on the spring end, 1 on the other. Heavy banding uses 2 bands – 1 on the spring end, 1 on the other.



FIGURE 1



FIGURE 2



FIGURE 3



FIGURE 4

TOP BRACKET (STANDARD BANDING)

Step 1: Secure Banding Following the instructions appropriate for your banding, position and attach bracket to pole, using duct tape to temporarily secure bracket while metal bands are positioned (see Figure 1). Secure metal bands with screwdriver or banding tool and remove any duct tape. Reminder: Spring on top!

Step 2: Install Arm and Secure Insert fiberglass arm through top pole pocket of banner and insert end of arm with the metal sleeve into the nose of the bracket.

Step 3: Secure With Pin and Zip Tie Insert pin through BannerSaver™ nose and fiberglass arm (see Figure 2). Finish with zip tie through grommet (see Figure 3).

Step 4: Complete Tighten banding. Clip excess banding and zip tie with snips (see Figure 4).

REPOSITION

Step 5: Position yourself down the pole to approximate bottom bracket position.

BOTTOM BRACKET

Step 6: Secure Banner to Arm At this point, your banner will be attached to the top bracket only and hanging downwards. Insert fiberglass arm through bottom pole pocket of banner with the metal sleeve inserted into the nose of the bracket. Note: The bottom bracket is not yet attached to pole at this point.

Step 7: Secure with Pin Insert the pin through BannerSaver™ nose and fiberglass arm. The banner is now fully extended and attached to the bracket. The bracket is now ready to be installed on the pole.

Step 8: Attach to Pole Push bottom bracket against pole – spring on bottom – and install both top bands.

Step 9: Bottom Band Push bottom edge of bracket against the pole and install bottom band.

Step 10: Complete Finish with zip tie through grommet. Trim ends of the zip tie and banding.

BOLTING AND WALL MOUNT INSTALLATION INSTRUCTIONS

The BannerSaver™ can be installed via a bolt instead of banding.

- BannerSaver Standard – BannerSaver Large: Install with 3/8" Bolt
- BannerSaver XL: Install with 1/2" Bolt
- *Note: The BannerSaver™ will spill wind regardless of its mounting on a pole or wall. However, the customer is responsible for all wall mounted installations, and warranties do not apply due to the wide variation in walls.*

FIBERFLEX INSTALLATION INSTRUCTIONS

- FiberFlex can be installed via bolt method or banding.
- To ensure the correct cantilever, the top bracket arrow needs to be pointing up and the bottom bracket arrow needs to be pointing down.

MAINTENANCE

With regular maintenance, your BannerSaver™ will last for years, protecting banners and reducing light pole liabilities. We recommend the following maintenance schedule:

- Return to the install site within 2-4 weeks of the first install to tighten bands if necessary.
- Check on banding once a quarter and/or after high wind storms. It may be necessary to tighten or replace banding from time to time.
- *Note: All banding of any kind, from any company, requires maintenance. Heavy banding costs more up front but will reduce maintenance costs in the long run.*

BANNERSAVER WARRANTY INFORMATION

- Britten, Inc. ("Seller") provides a **fifteen-year limited warranty** on certain BannerSaver™ products against material defects in product design and manufacturing, as well as warranting performance of the product up to its wind-spilling capabilities as outlined in the BannerSaver™ Wind Tunnel Test Report, assuming proper installation methods and subject to the warranty limitations described herein. During this warranty period, Seller will replace or repair the BannerSaver™ bracket assembly, which includes the base bracket/nose, screw, washers, and spring. This warranty does not apply to any accessory elements of the bracket, such as the fiberglass bracket arms, safety pins, or other similar items not included as part of the bracket assembly. This warranty applies only to the original purchaser of the bracket ("Buyer") and is in lieu of all other warranties either expressed or implied for a period of fifteen years from the date of purchase ("Warranty Period").
- For full warranty details, please visit <https://bannersaver.com/help/warranty-information>